



Changshu Talent
Semiconductors Co.,Ltd
Tel:0086-512-52851998
Fax:0086-512-52153129

**R4000
THRU
R5000**

**200 mA
High Voltage
Silicon Rectifier
4000 to 5000 Volts**

Features

- Lead Free Finish/Rohs Compliant (Note1) ("P" Suffix designates Compliant. See ordering information)
- Low Cost
- Low Leakage
- High Surge Capability
- High Current Capability
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1

Maximum Ratings

- Operating Temperature: -65°C to +150°C
- Storage Temperature: -65°C to +150°C


Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
R4000	R4000	4000V	2800V	4000V
R5000	R5000	5000V	3500V	5000V

Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	200mA	$T_A = 50^\circ\text{C}$
Peak Forward Surge Current	I_{FSM}	30A	8.3ms, half sine
Maximum Instantaneous Forward Voltage	V_F	5.0V	$I_{FM} = 0.2A$; $T_A = 25^\circ\text{C}$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	5.0 μ A 40 μ A	$T_A = 25^\circ\text{C}$ $T_C = 100^\circ\text{C}$
Maximum Full Load Reverse Current, Full Cycle Average 9.5mm lead length at $T_L = 75^\circ\text{C}$	$I_{R(AV)}$	30 μ A	

Note: 1. High Temperature Solder Exemptions Applied, see EU Directive Annex 7.

DO-15

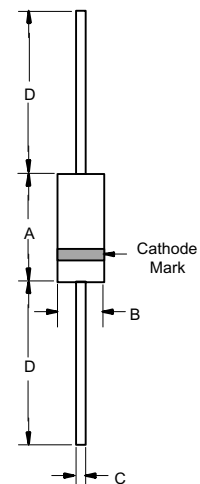

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.230	.300	5.80	7.60	
B	.104	.140	2.60	3.60	
C	.026	.034	.70	.90	
D	1.000	---	25.40	---	