



Changshu Talent
Semiconductors Co.,Ltd
Tel:0086-512-52851998
Fax:0086-512-52153129

ESDLC3V3D3 Thru ESDLC12VD3

Features


- SOD-323 package
- Low clamping voltage
- IEC61000-4-2(ESD) $\pm 15\text{kvV}$ (air), $\pm 8\text{kv}$ (contact)
- 350W peak pulse power (8/20 us)
Epoxy meets UL 94 V-0 flammability rating
Moisture Sensitivity Level 1

Maximum Ratings

Parameter	Symbol	Limits	unit
Peak pulse power 8/20us	P_{PP}	350	W
Operating Temperature	T_j	-55~+150	$^{\circ}\text{C}$
Storage temperature	T_{stg}	-55~+150	$^{\circ}\text{C}$


3.3V-12Volts ESD Protection Device

SOD-323

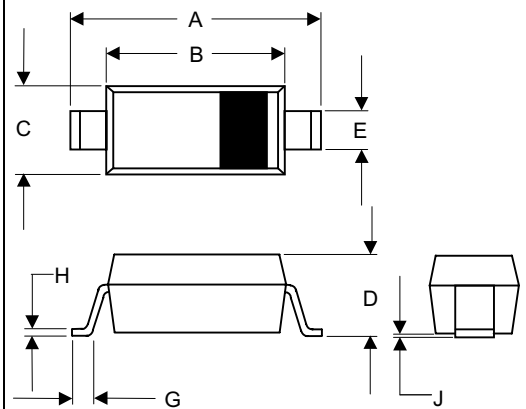


DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.090	.107	2.30	2.70	
B	.063	.071	1.60	1.80	
C	.045	.053	1.15	1.35	
D	.031	.045	0.80	1.15	
E	.010	.016	0.25	0.40	
G	.004	.018	0.10	0.45	
H	.004	.010	0.10	0.25	
J	-----	.006	-----	0.15	

SUGGESTED SOLDER PAD LAYOUT

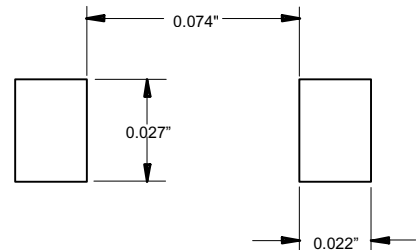

Pin Configuration-Top View



ESDLC3V3D3-ESDLC12VD3



ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Device	V_{RWM}	I_R @ V_{RWM}	Min Breakdown Voltage V_{BR} @1mA	Max Clamping Voltage V_c		Typ. Cj @0V,1MHZ
				@ $I_P=1A$	@ I_{PP}	
	Volts	μA	Volts	Volts	Volts	pF
ESDLC3V3D3	3.3	20	4.0	7.0	36.0@28.0A	4.5
ESDLC5V0D3	5	5	6.0	9.8	32.0@21.0A	5
ESDLC12VD3	12	5	13.3	19.0	28.6@11.0A	3

FIGURE 1
PEAK PULSE POWER VS PULSE TIME

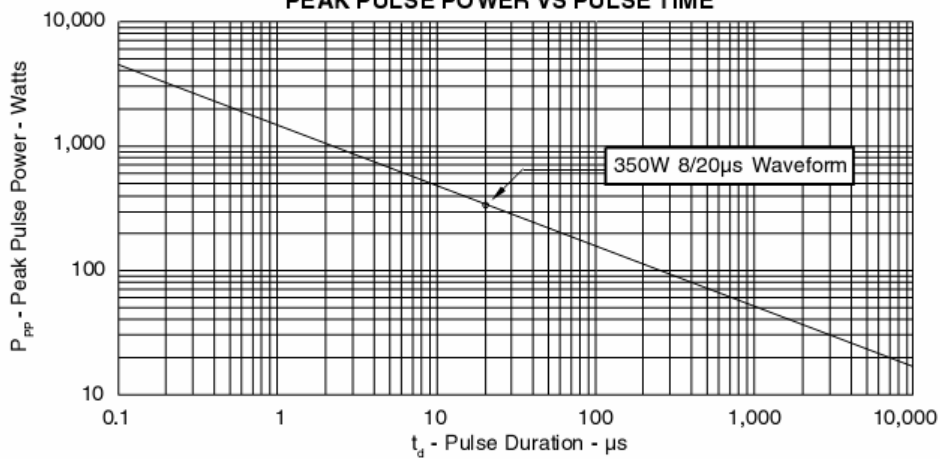


FIGURE 2
PULSE WAVE FORM

